




**FXPLA** is BOPP film with outstanding transparency and brilliance, non-heat sealable, one side corona treated. The film is suitable for printing and wraparound labels.

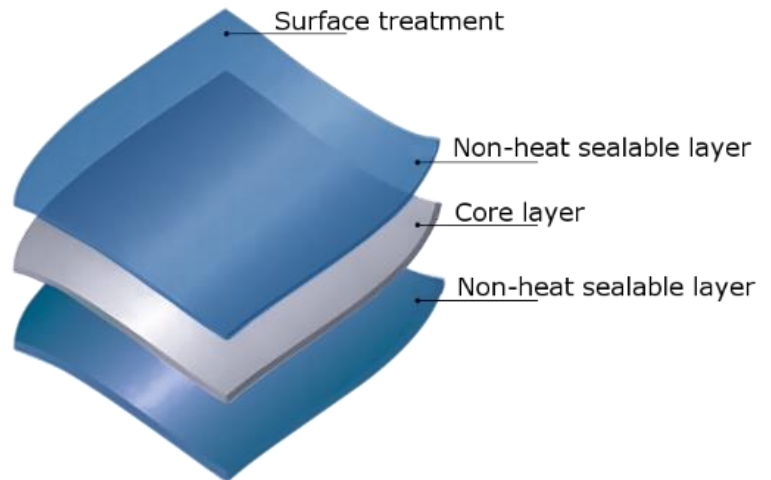

### TYPICAL

Wraparound labels

High quality rotogravure and flexo printing

Properties		Test Methods	Deviation	Typical Values					
Thickness $\mu\text{m}$				20	25	30	35	38	40
Average thickness deviation %			$\pm 0.5$	2	2	1.5	1.5	1.5	1.5
Yield, $\text{m}^2/\text{kg}$			$\pm 5\%$	54.9	44	36.6	31.4	28.9	27.4
Unit weight, $\text{g}/\text{m}^2$			$\pm 5\%$	18.2	22.7	27.3	31.8	34.5	36.4
Gloss ( $45^\circ$ )		ASTM D 2457	$\pm 2$	90	90	90	90	90	90
Haze, %		ASTM D 1003	$\pm 0.2$	1.5	1.6	1.6	1.8	1.8	1.8
Coefficient of Friction		ASTM D 1894	$\pm 0.1$	0.4	0.4	0.4	0.4	0.4	0.4
Shrinkage, %		BMS TT 0.2		4.0	4.0	4.0	4.0	4.0	4.0
(120°C, 5 min)									
Elongation at break, %		ASTM D 882	$\pm 30$	190	180	180	180	180	180
MD									
TD				70	70	70	70	70	70
Tensile strength, MPa		ASTM D 882	$\pm 15$	150	150	150	150	150	150
MD									
TD				250	250	250	250	250	250
Surface treatment, dynes/cm		ASTM D 2578a		Min 38	Min 38	Min 38	Min 38	Min 38	Min 38

The specified values are based on average results, measured by the manufacturer during standard production. They should not be considered as Data Sheet of any particular product.

The end user should be satisfied as to the suitability of the product for the intended application and the present regulatory regime. Therefore, Plastchim-T AD disclaims any liability for damages arising from the non-suitability of the product for the effected application.



**Food contact:** The BOPP Film complies with all national and international standards and requirements for food contact. The Declaration of Compliance is accessible at [www.plastchim-t.com](http://www.plastchim-t.com).

**PACKING**

	Core Diameter	Outer Diameter *	Notes
<b>Vertical</b>	152 mm (6`) 76 mm (3`)	≤ 550 mm	≤ 700 mm – two or more rows > 700 mm – one row
<b>Horizontal</b>	152 mm (6`) 76 mm (3`)	≤ 770 mm	

(\*) In case of no other requirements

**TOLERANCES**

Weight tolerance, depending on the order volume	Width tolerance	Length tolerance
≤ 1 000 kg ± 20% 1001 ÷ 10 0 ± 10% >10 000 ± 5%	± 2 mm	±5 %

**Storage and Transportation Terms & Conditions**

Palletizing of goods is done according to customer's requirements.

The storage of all goods is in dry, covered and clean warehouses.

The transportation of the goods is carried out in dry, covered and clean means of transport.

The recommended temperature of storage/transportation is 10-30°C. If the temperature is not within the recommended limits, the following issues may occur:

- Decrease of dyne level
- Higher haze of the film
- Poor adhesion of the film surface that on a later stage could be an issue for laminating and printing
- Extremely low COF that can trouble further processing

Excessive humidity can be a reason for film blocking.

It is recommended that BOPP film should be tempered at operating room temperature for 24 hours before use.

Metalized films should be laminated because the metal layer is not resistant to scratches. Before printing on metalized films, it is strongly recommended to apply a primer. Adherence to the above mentioned storage conditions ensures that the film is suitable to be used up to 6 months after production.

Claims regarding to the transportation are accepted within 1 week after the delivery date. If any, a record has to be taken in the CMR.

If any hidden defects occur, Plastchim-T AD may agree to refund the cost for up to 3 rolls from a certain order.

**Last update: 22<sup>th</sup> March 2017**